




MY21 **ROAD BIKE** GEOMETRY

INDEX

TEAMMACHINE SLR01 - ICS Carbon	2
TEAMMACHINE SLR01 - ICS 2	3
TEAMMACHINE SLR - ICS 01	4
TEAMMACHINE SLR - Classic Stem	5
TEAMMACHINE ALR DISC	6
TEAMMACHINE ALR	7
ROADMACHINE 01	8
ROADMACHINE	9
ROADMACHINE X	10
TIMEMACHINE 01 ROAD	11
TIMEMACHINE 01 DISC	12
TIMEMACHINE	13
TRACKMACHINE 01	14
TRACKMACHINE AL	15

TEAMMACHINE SLR01 Geometry - ICS Carbon

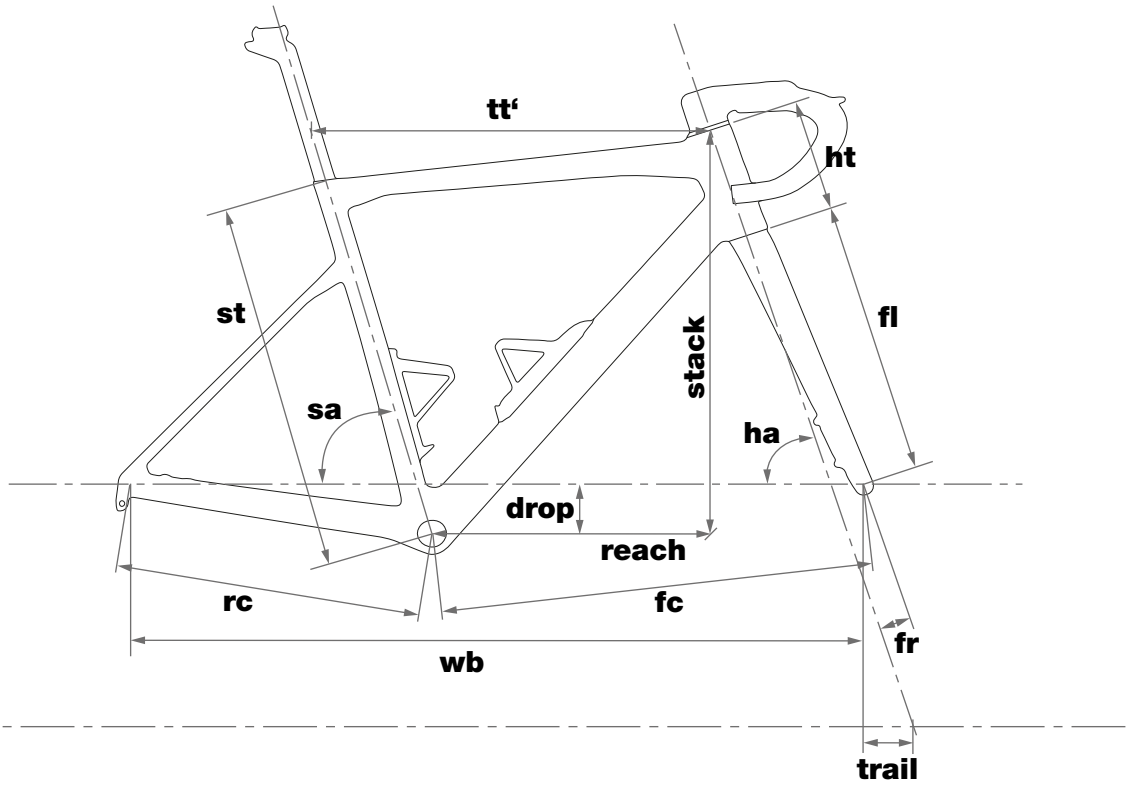


Unless otherwise indicated, all measurements are given in mm.

TEAMMACHINE SLR01 - ICS CARBON

Size	47	51	54	56	58	61
Rider Height cm	<166	166-174	172-180	178-186	184-192	>190
Stack	506	530	550	565	584	608
Reach	367	377	386	392	401	409
Seat Tube (st)	423	468	504	524	545	574
Top Tube (tt')	517	534	549	559	574	589
Head Tube (ht)	110	130	145	165	184	210
Seat Angle ° (sa)	73.5	73.5	73.5	73.5	73.5	73.5
Head Angle ° (ha)	71.5	71.5	72.3	72.3	72.3	72.3
Rear Center (rc)	410	410	410	410	410	410
Front Center (fc)	568	586	589	599	614	630
Wheelbase (wb)	968	986	989	1000	1015	1030
BB Drop (drop)	69	69	69	69	69	69
Fork Length (fl)	368	368	368	368	368	368
Fork Rake (fr)	48	48	43	43	43	43
Trail	63	63	63	63	63	63
Crank Length	170	170	172.5	172.5	175	175
Stem Length (ICS Carbon)	90	100	100	110	110	120
Stem Angle ° (ICS Carbon)	-12.5	-12.5	-12.5	-12.5	-12.5	-12.5
Bar Width	400	420	420	420	420	420
Bar Drop (ICS Carbon)	127	127	127	127	127	127
Bar Reach (ICS Carbon)	67	67	67	67	67	67
Seatpost Length	330	380	380	380	380	380
Seatpost Offset	15	15	15	15	15	15
Standover Height	717	752	779	797	817	843

TEAMMACHINE SLR01 Geometry - ICS 2

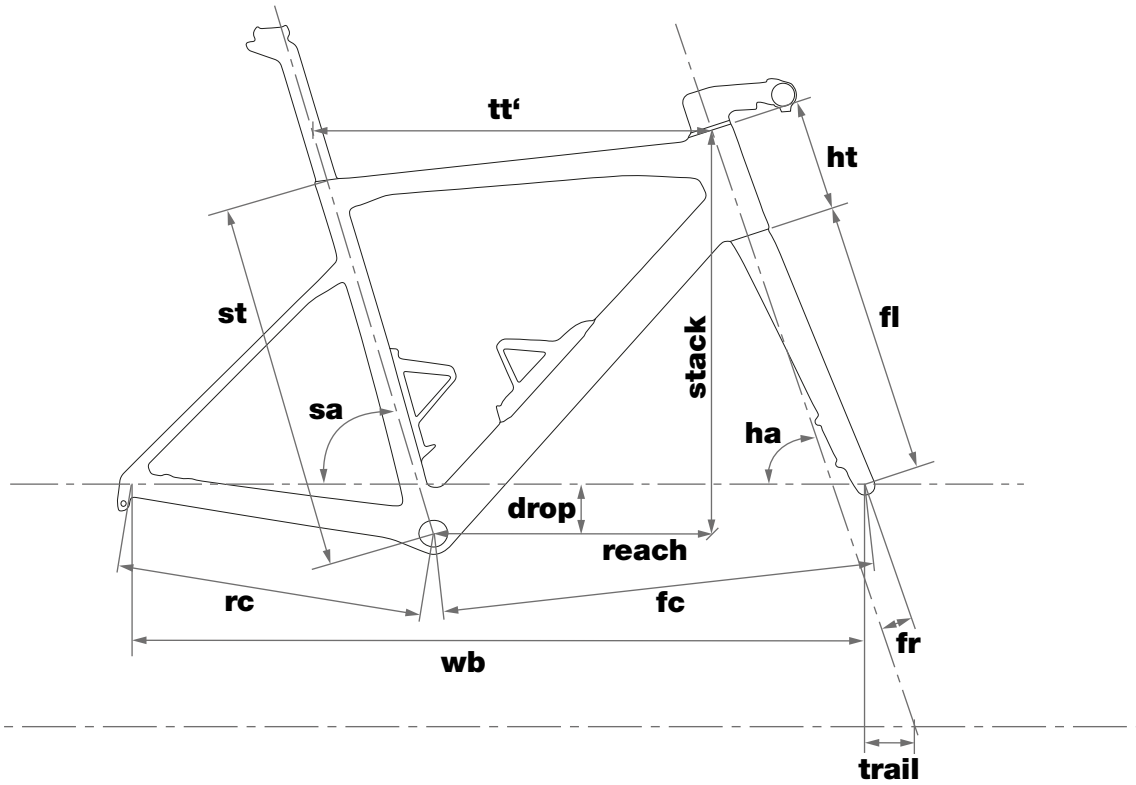


Unless otherwise indicated, all measurements are given in mm.

TEAMMACHINE SLR01 - ICS2

Size	47	51	54	56	58	61
Rider Height cm	<166	166-174	172-180	178-186	184-192	>190
Stack	506	530	550	565	584	608
Reach	367	377	386	392	401	409
Seat Tube (st)	423	468	504	524	545	574
Top Tube (tt')	517	534	549	559	574	589
Head Tube (ht)	110	130	145	165	184	210
Seat Angle ° (sa)	73.5	73.5	73.5	73.5	73.5	73.5
Head Angle ° (ha)	71.5	71.5	72.3	72.3	72.3	72.3
Rear Center (rc)	410	410	410	410	410	410
Front Center (fc)	568	586	589	599	614	630
Wheelbase (wb)	968	986	989	1000	1015	1030
BB Drop (drop)	69	69	69	69	69	69
Fork Length (fl)	368	368	368	368	368	368
Fork Rake (fr)	48	48	43	43	43	43
Trail	63	63	63	63	63	63
Crank Length	170	170	172.5	172.5	175	175
Stem Length	90	100	100	110	110	120
Stem Angle°	-12.5	-12.5	-12.5	-12.5	-12.5	-12.5
Bar Width	400	420	420	420	420	420
Bar Drop (RAB02)	125	125	125	125	125	125
Bar Reach (RAB02)	70	70	70	70	70	70
Seatpost Length	330	380	380	380	380	380
Seatpost Offset	15	15	15	15	15	15
Standover Height	717	752	779	797	817	843
Bar Drop (RCB01)	117					
Bar Reach (RCB01)	77					

TEAMMACHINE SLR Geometry - ICS 01

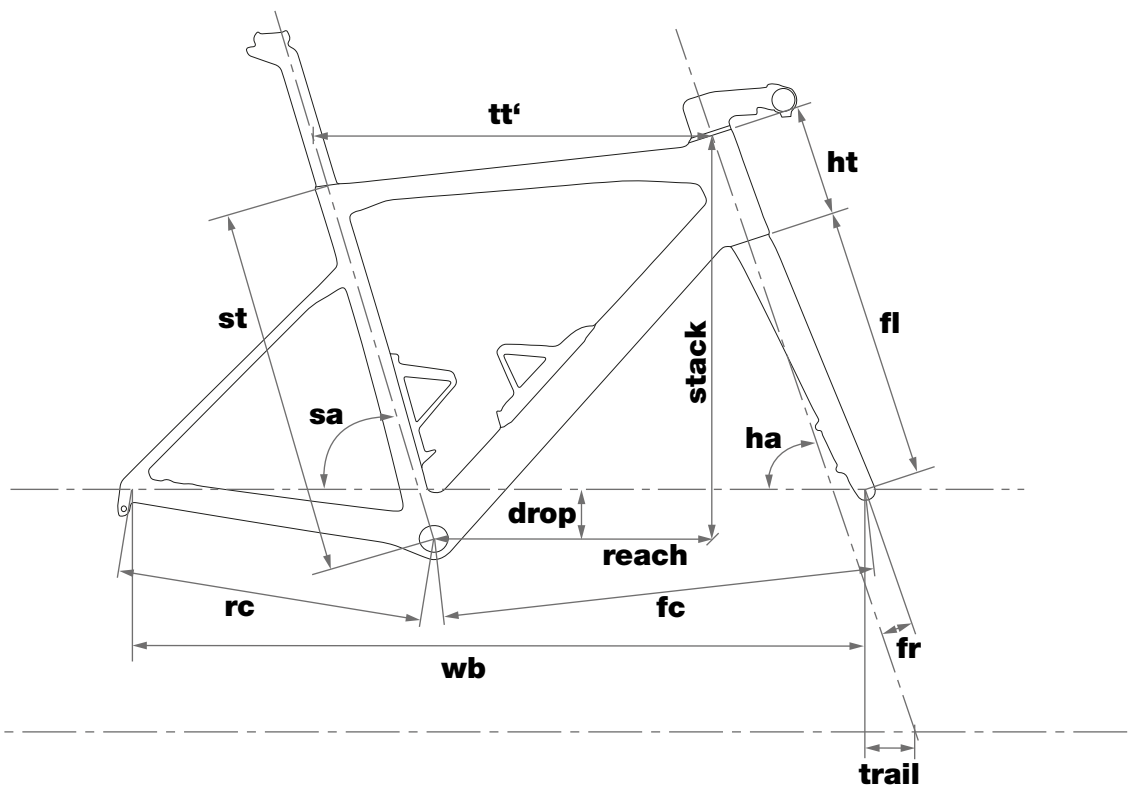


Unless otherwise indicated, all measurements are given in mm.

TEAMMACHINE SLR - ICS 01

Size	47	51	54	56	58	61
Rider Height cm	<166	166-174	172-180	178-186	184-192	>190
Stack	506	530	550	565	584	608
Reach	367	377	386	392	401	409
Seat Tube (st)	423	468	504	524	545	574
Top Tube (tt')	517	534	549	559	574	589
Head Tube (ht)	110	130	145	165	184	210
Seat Angle ° (sa)	73.5	73.5	73.5	73.5	73.5	73.5
Head Angle ° (ha)	71.5	71.5	72.3	72.3	72.3	72.3
Rear Center (rc)	410	410	410	410	410	410
Front Center (fc)	568	586	589	599	614	630
Wheelbase (wb)	968	986	989	1000	1015	1030
BB Drop (drop)	69	69	69	69	69	69
Fork Length (fl)	368	368	368	368	368	368
Fork Rake (fr)	48	48	43	43	43	43
Trail	63	63	63	63	63	63
Crank Length	170	170	172.5	172.5	175	175
Stem Length	90	100	100	110	110	120
Stem Angle°	-12.5	-12.5	-12.5	-12.5	-12.5	-12.5
Bar Width	400	420	420	420	420	420
Bar Drop (RAB02)	125	125	125	125	125	125
Bar Reach (RAB02)	70	70	70	70	70	70
Seatpost Length	330	380	380	380	380	380
Seatpost Offset	15	15	15	15	15	15
Standover Height	717	752	779	797	817	843

TEAMMACHINE SLR Geometry - Classic Stem

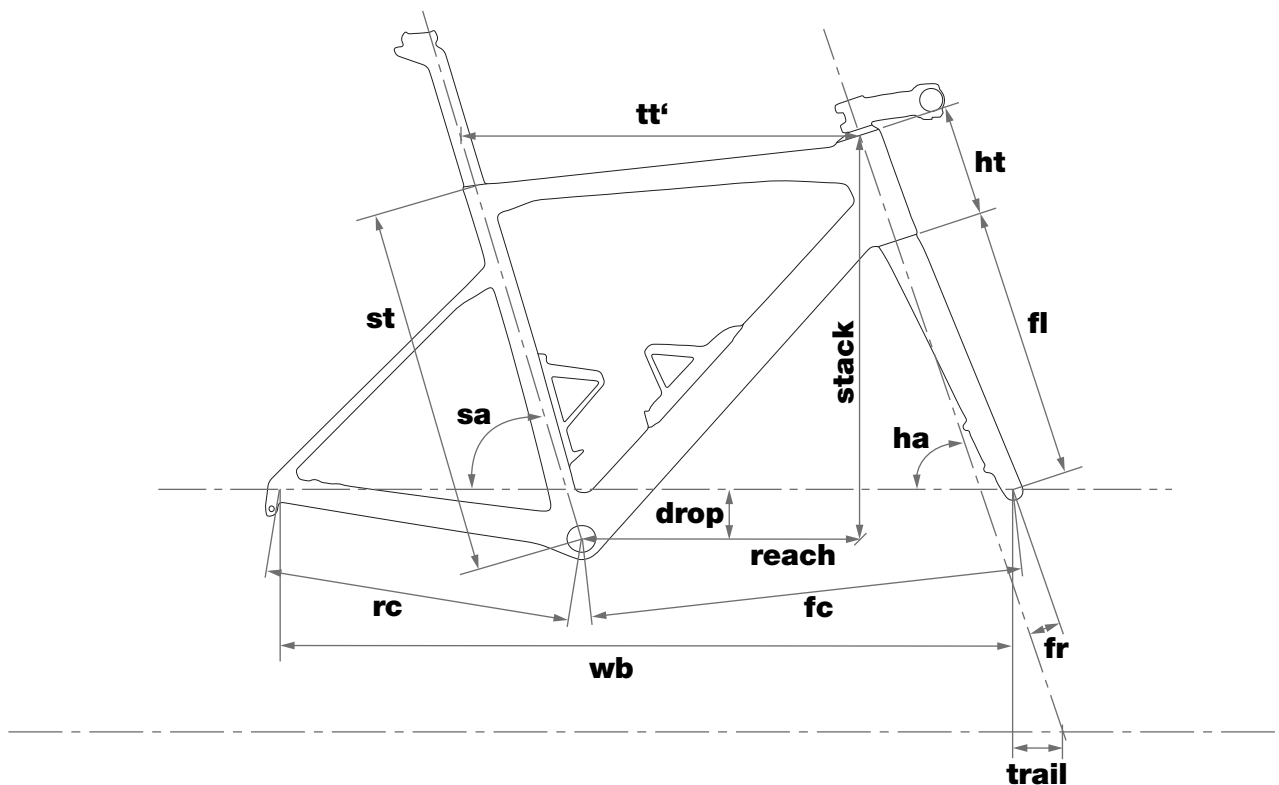


Unless otherwise indicated, all measurements are given in mm.

TEAMMACHINE SLR - Classic Stem

Size	47	51	54	56	58	61
Rider Height cm	<166	166-174	172-180	178-186	184-192	>190
Stack	506	530	550	565	584	608
Reach	367	377	386	392	401	409
Seat Tube (st)	423	468	504	524	545	574
Top Tube (tt')	517	534	549	559	574	589
Head Tube (ht)	110	130	145	165	184	210
Seat Angle ° (sa)	73.5	73.5	73.5	73.5	73.5	73.5
Head Angle ° (ha)	71.5	71.5	72.3	72.3	72.3	72.3
Rear Center (rc)	410	410	410	410	410	410
Front Center (fc)	568	586	589	599	614	630
Wheelbase (wb)	968	986	989	1000	1015	1030
BB Drop (drop)	69	69	69	69	69	69
Fork Length (fl)	368	368	368	368	368	368
Fork Rake (fr)	48	48	43	43	43	43
Trail	63	63	63	63	63	63
Crank Length	170	170	172.5	172.5	175	175
Stem Length	90	90	100	110	110	120
Stem Angle°	±8	±8	±8	±8	±8	±8
Bar Width	400	420	420	420	420	440
Bar Drop	125	125	125	125	125	125
Bar Reach	70	70	70	70	70	70
Seatpost Length	330	380	380	380	380	380
Seatpost Offset	15	15	15	15	15	15
Standover Height	717	752	779	797	817	843


TEAMMACHINE ALR DISC Geometry

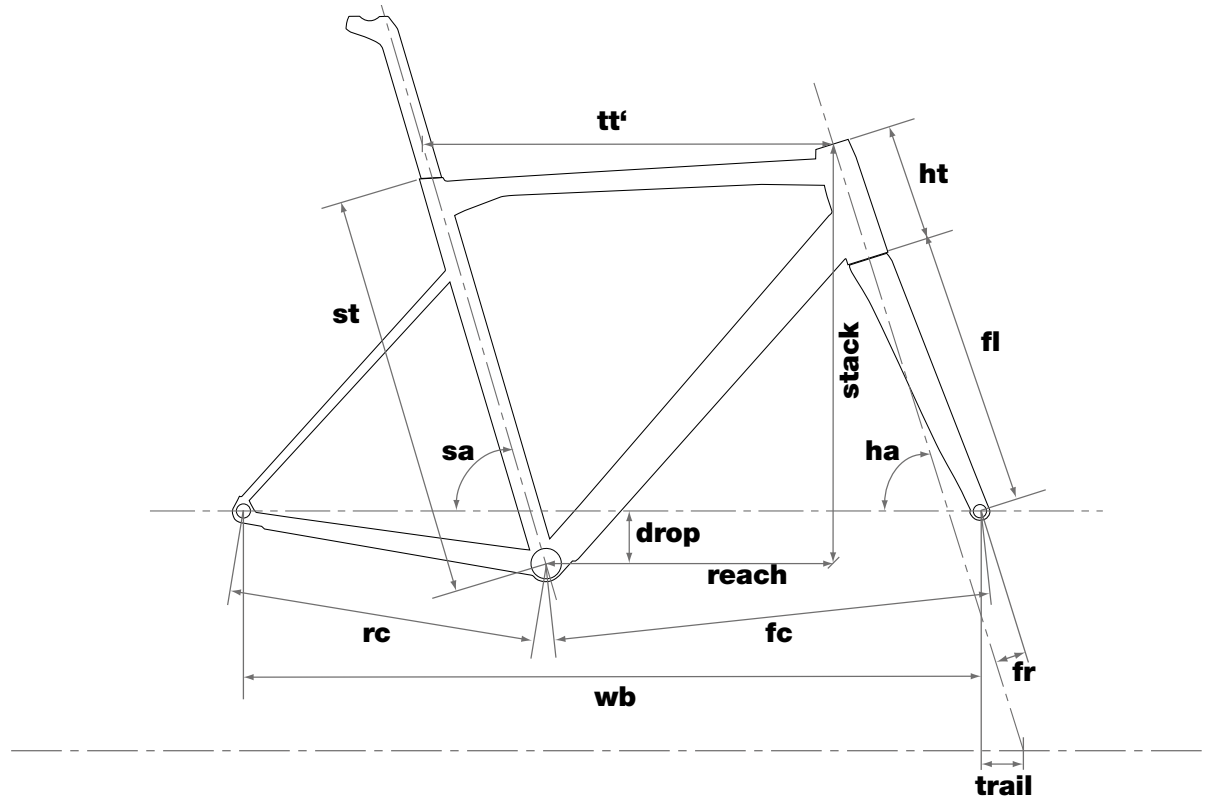

Unless otherwise indicated, all measurements are given in mm.

Size	47	51	54	57	60
Rider Height cm	<168	166-174	172-180	178-188	>186
Stack	515	539	559	583	610
Reach	365	374	383	391	402
Seat Tube (st)	442	505	535	565	600
Top Tube (tt')	518	534	549	564	583
Head Tube (ht)	118	138	157	182	210
Seat Angle ° (sa)	73.5	73.5	73.5	73.5	73.5
Head Angle ° (ha)	70.5	72	72.5	72.5	72.5
Rear Center (rc)	410	410	410	410	410
Front Center (fc)	571	575	585	601	620
Wheelbase (wb)	971	975	985	1001	1020
BB Drop (drop)	69	69	69	69	69
Fork Length (fl)	369	369	369	369	369
Fork Rake (fr)	41.6	41.6	41.6	41.6	41.6
Trail	76	66	63	63	63
Crank Length	170	170	172.5	172.5	175
Stem Length (RSM01)	90	100	110	110	120
Stem Angle° (RSM01)	± 8	± 8	± 8	± 8	± 8
Bar Width	400	420	420	420	440
Bar Drop (RAB02/03)	125	125	125	125	125
Bar Reach (RAB02/03)	70	70	70	70	70
Seatpost Length	300	330	330	330	330
Seatpost Offset	15	15	15	15	15
Standover Height	705	751	778	804	835


TEAMMACHINE ALR Geometry

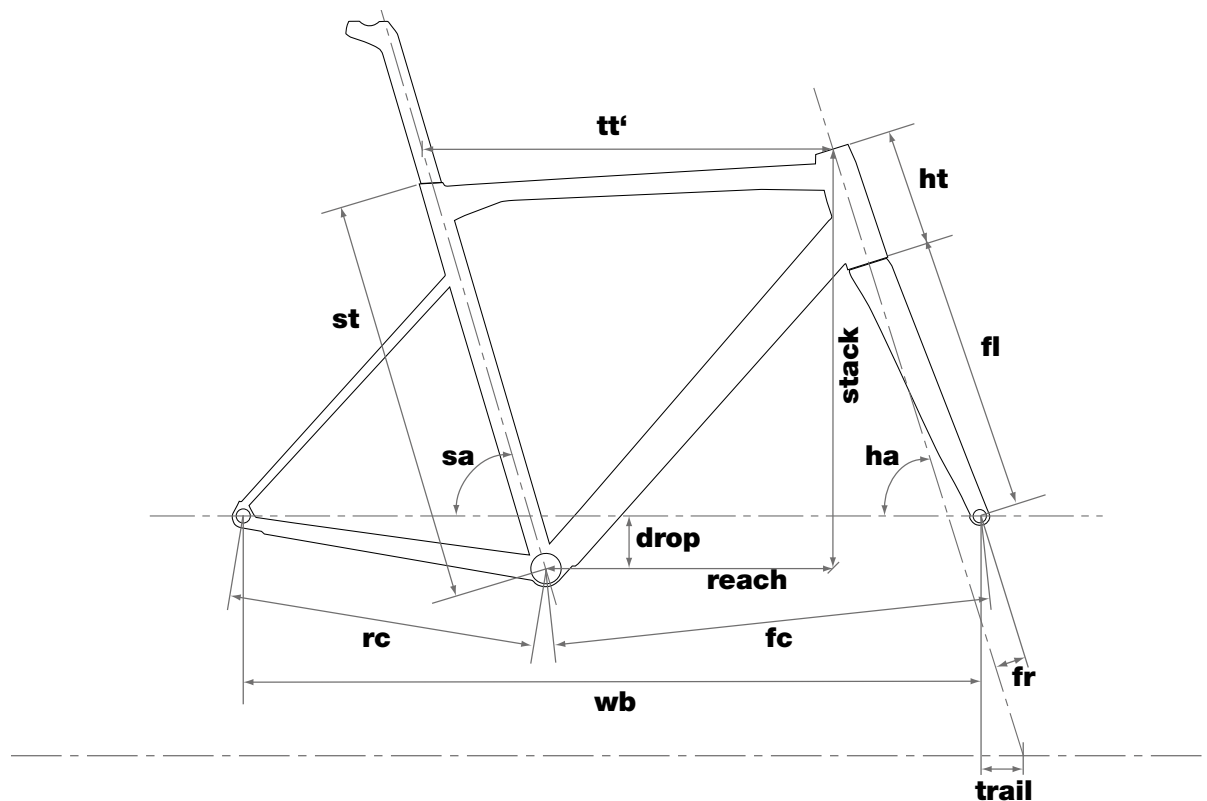

Unless otherwise indicated, all measurements are given in mm.

Size	47	51	54	57	60
Rider Height cm	<168	166-174	172-180	178-188	>186
Stack	515	539	559	583	610
Reach	365	374	383	391	402
Seat Tube (st)	442	505	535	565	600
Top Tube (tt')	518	534	549	564	583
Head Tube (ht)	118	138	157	182	210
Seat Angle ° (sa)	73.5	73.5	73.5	73.5	73.5
Head Angle ° (ha)	70.5	72	72.5	72.5	72.5
Rear Center (rc)	410	410	410	410	410
Front Center (fc)	571	575	585	601	620
Wheelbase (wb)	971	975	985	1001	1020
BB Drop (drop)	69	69	69	69	69
Fork Length (fl)	369	369	369	369	369
Fork Rake (fr)	41.6	41.6	41.6	41.6	41.6
Trail	76	66	63	63	63
Crank Length	170	170	172.5	172.5	175
Stem Length (RSM01)	90	100	110	110	120
Stem Angle° (RSM01)	± 8	± 8	± 8	± 8	± 8
Bar Width	400	420	420	420	440
Bar Drop (RAB02/03)	125	125	125	125	125
Bar Reach (RAB02/03)	70	70	70	70	70
Seatpost Length	300	330	330	330	330
Seatpost Offset	15	15	15	15	15
Standover Height	705	751	778	804	835

ROADMACHINE 01 Geometry

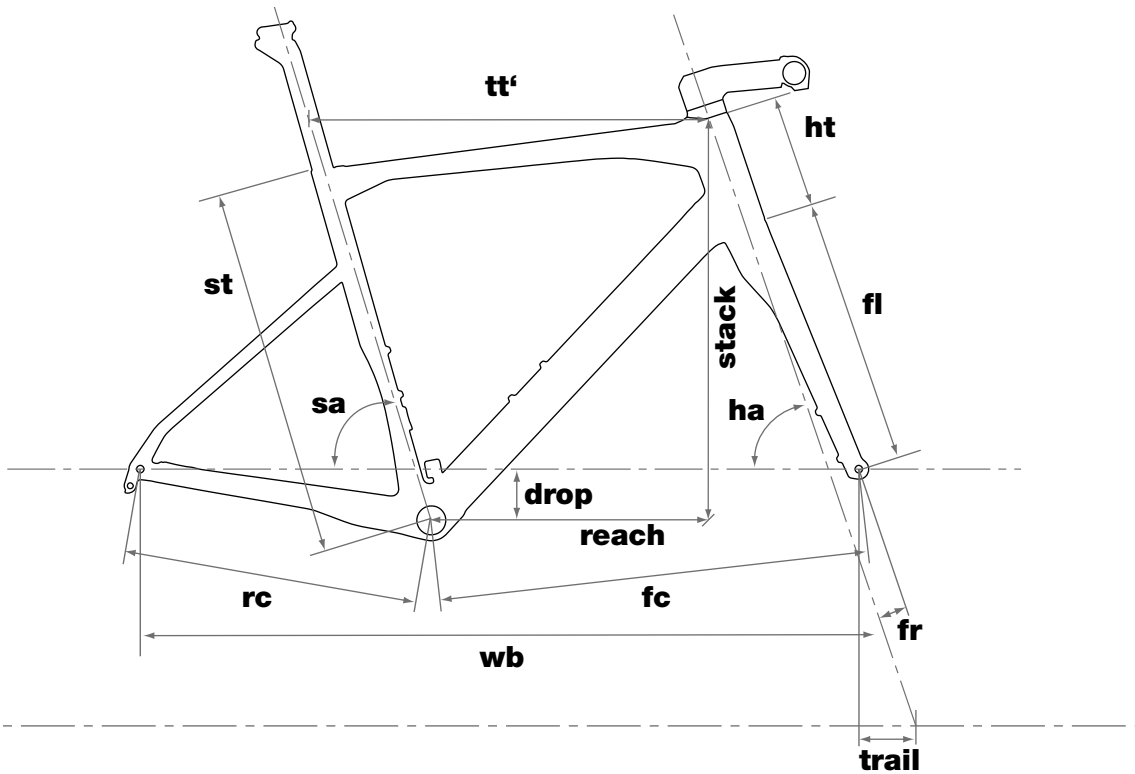


Unless otherwise indicated, all measurements are given in mm.

ROADMACHINE 01

Size	47	51	54	56	58	61
Rider Height cm	<166	166-174	172-180	178-186	184-192	>190
Stack	516	541	562	586	610	644
Reach	374	382	386	390	394	398
Seat Tube (st)	420	457	500	522	539	573
Top Tube (tt')	522	532	546	556	568	583
Head Tube (ht)	112	139	156	181	206	242
Seat Angle ° (sa)	74.2	74.2	74.2	74.2	74.2	74.2
Head Angle ° (ha)	71.2	71.2	72	72	72	72
Rear Center (rc)	410	410	410	410	410	410
Front Center (fc)	583	599	597	609	621	635
Wheelbase (wb)	982	999	997	1008	1020	1035
BB Drop (drop)	71	71	71	71	71	71
Fork Length (fl)	375	375	375	375	375	375
Fork Rake (fr)	50	50	45	45	45	45
Trail	63	63	63	63	63	63
Crank Length	170	170	172.5	172.5	175	175
Stem Length (ICS1)	90	90	100	110	110	120
Stem Angle° (ICS1)	-12.5	-12.5	-12.5	-12.5	-12.5	-12.5
Bar Width	400	420	420	420	420	440
Bar Drop (RCB01)	117	117	117	117	117	117
Bar Reach (RCB01)	77	77	77	77	77	77
Seatpost Length	330	380	380	380	380	430
Seatpost Offset	15	15	15	15	15	15
Standover Height	tbd	tbd	tbd	tbd	tbd	tbd
Bar Drop (RAB02/03)	125					
Bar Reach (RAB02/03)	70					


ROADMACHINE Geometry

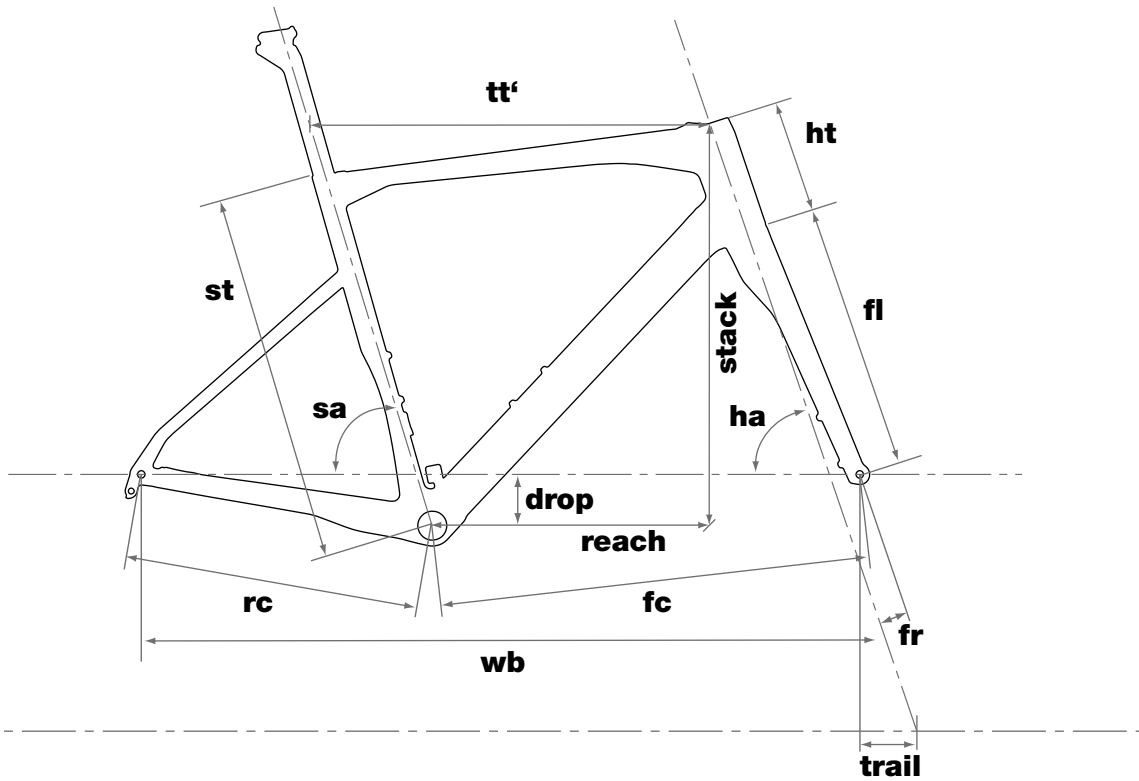

Unless otherwise indicated, all measurements are given in mm.

Size	47	51	54	56	58	61
Rider Height cm	<166	166-174	172-180	178-186	184-192	>190
Stack	516	541	562	586	610	644
Reach	374	382	386	390	394	398
Seat Tube (st)	420	457	500	522	539	573
Top Tube (tt')	522	532	546	556	568	583
Head Tube (ht)	112	139	156	181	206	242
Seat Angle ° (sa)	74.2	74.2	74.2	74.2	74.2	74.2
Head Angle ° (ha)	71.2	71.2	72	72	72	72
Rear Center (rc)	410	410	410	410	410	410
Front Center (fc)	583	599	597	609	621	635
Wheelbase (wb)	982	999	997	1008	1020	1035
BB Drop (drop)	71	71	71	71	71	71
Fork Length (fl)	375	375	375	375	375	375
Fork Rake (fr)	50	50	45	45	45	45
Trail	63	63	63	63	63	63
Crank Length	170	170	172.5	172.5	175	175
Stem Length (RSM01)	90	90	100	110	110	120
Stem Angle ° (RSM01)	±8	±8	±8	±8	±8	±8
Bar Width	400	420	420	420	420	440
Bar Drop (RAB02/03)	125	125	125	125	125	125
Bar Drop (RAB02/03)	70	70	70	70	70	70
Seatpost Length	330	380	380	380	380	430
Seatpost Offset	15	15	15	15	15	15
Standover Height	tbd	tbd	tbd	tbd	tbd	tbd


ROADMACHINE X Geometry

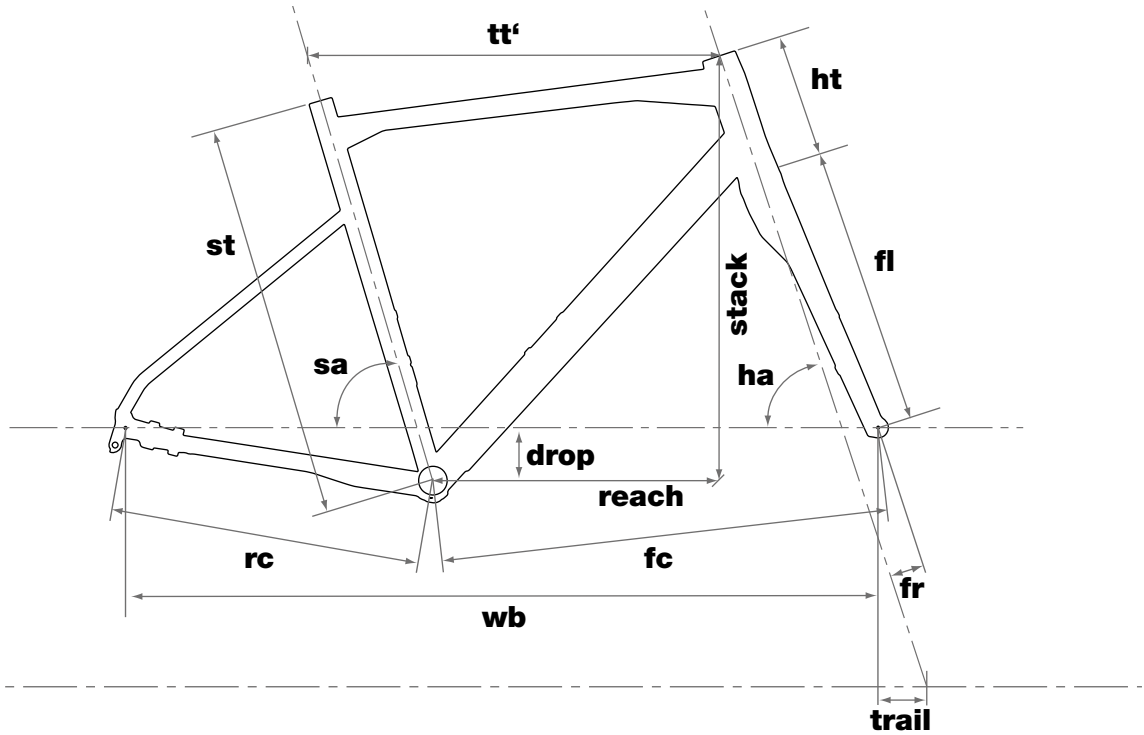

Unless otherwise indicated, all measurements are given in mm.

Size	47	51	54	56	58	61
Rider Height cm	<166	166-174	172-180	178-186	184-192	>190
Stack	525	550	571	585	604	628
Reach	376	376	385	391	400	408
Seat Tube (st)	465	490	533	548	564	600
Top Tube (tt')	532	539	554	564	579	594
Head Tube (ht)	128	154	172	187	205	228
Seat Angle ° (sa)	73.5	73.5	73.5	73.5	73.5	73.5
Head Angle ° (ha)	70.5	70.5	71.5	71.5	72	72.5
Rear Center (rc)	420	420	420	420	420	420
Front Center (fc)	589	598	607	615	625	640
Wheelbase (wb)	998	1007	1016	1024	1034	1044
BB Drop (drop)	71	71	71	71	71	71
Fork Length (fl)	369	369	369	369	369	369
Fork Rake (fr)	45	45	45	45	45	45
Trail	73	73	66	66	63	60
Crank Length	170	170	172.5	172.5	175	175
Stem Length (RSM01)	90	90	100	100	110	110
Stem Angle ° (RSM01)	± 8	± 8	± 8	± 8	± 8	± 8
Bar Width	400	420	420	420	440	440
Bar Drop (RAB02/03)	125	125	125	125	125	125
Bar Drop (RAB02/03)	70	70	70	70	70	70
Seatpost Length	350	350	350	350	350	350
Seatpost Offset	15	15	15	15	15	15
Standover Height	717	757	786	803	820	849


TIMEMACHINE 01 ROAD Geometry

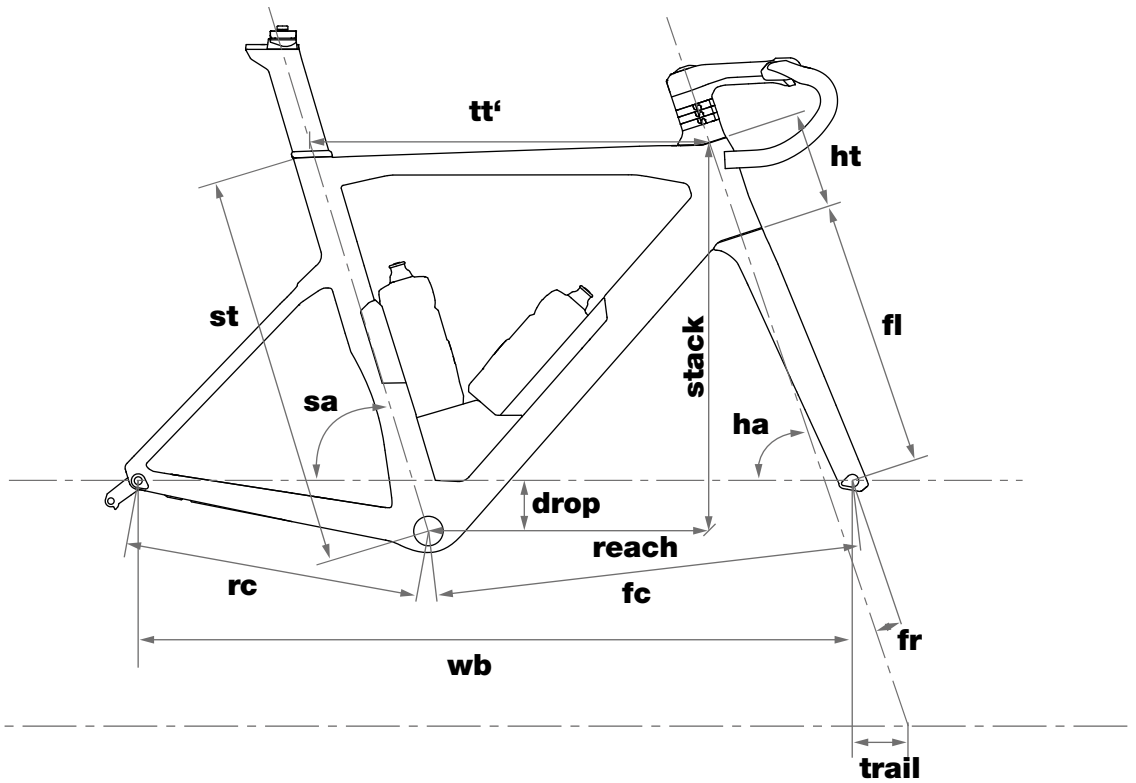

Unless otherwise indicated, all measurements are given in mm.

Size	47	51	54	56	58	61
Rider Height cm	<166	166-174	172-180	178-186	184-192	>190
Stack	496	520	540	555	574	598
Reach	373	381	390	395	405	413
Seat Tube (st)	480	518	548	568	588	611
Top Tube (tt')	520	535	550	560	575	590
Head Tube (ht)	88	113	135	150	170	196
Seat Angle ° (sa)	73.5	73.5	73.5	73.5	73.5	73.5
Head Angle ° (ha)	71.2	71.2	72	72	72	72
Rear Center (rc)	410	410	410	410	410	410
Front Center (fc)	577	592	594	604	620	636
Wheelbase (wb)	975	991	994	1004	1020	1036
BB Drop (drop)	70	70	70	70	70	70
Fork Length (fl)	379	379	374	374	374	374
Fork Rake (fr)	50	50	45	45	45	45
Trail	62	62	62	62	62	62
Crank Length	170	170	172.5	172.5	175	175
Stem Length (ICS Aero)	100	100	110	110	110	120
Stem Angle ° (ICS Aero)	-15	-15	-15	-15	-15	-15
Bar Width	400	420	420	420	420	440
Bar Drop (ICS Aero)	122	122	122	122	122	122
Bar Reach (ICS Aero)	66	66	66	66	66	66
Seatpost Length	210	210	270	270	270	270
Seatpost Offset	0-15-30	0-15-30	0-15-30	0-15-30	0-15-30	0-15-30
Standover Height	743	774	799	816	834	858

TIMEMACHINE 01 DISC Geometry

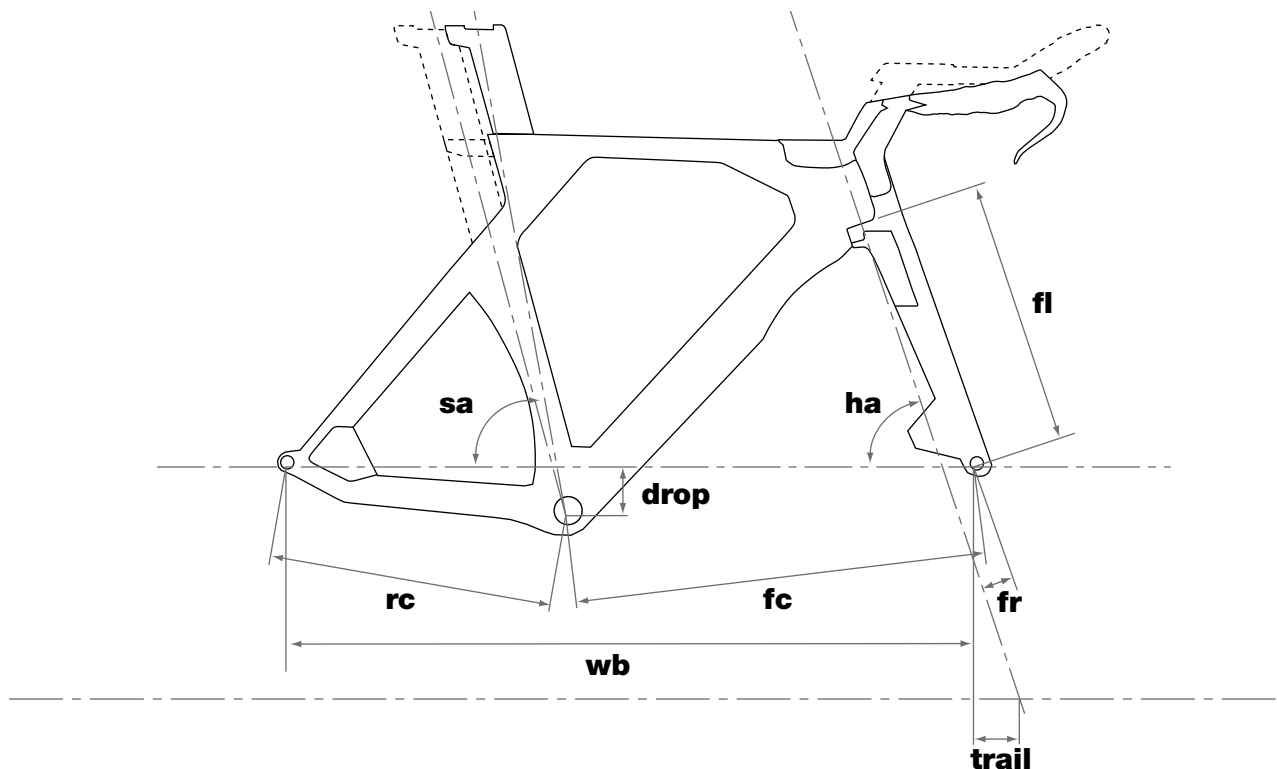


Unless otherwise indicated, all measurements are given in mm.

Size	S	M-S	M-L	L
Rider Height cm	<170	172-180	178-188	186-196
Stack	480	515	515	556
Reach	393	377	418	442
Seat Tube (st)	495	550	550	592
Top Tube (tt')	-	-	-	-
Head Tube (ht)	-	-	-	-
Seat Angle ° (sa)	71.5 - 80.8	71.5 - 80.8	71.5 - 80.8	71.5 - 80.8
Head Angle ° (ha)	71.5	71.5	71.5	71.5
Rear Center (rc)	400	400	400	400
Front Center (fc)	580	578	619	649
Wheelbase (wb)	972	968	1009	1039
BB Drop (drop)	58	68	68	68
Fork Length (fl)	374	374	374	374
Fork Rake (fr)	45	45	45	45
Trail	60	60	60	60
Crank Length	165	170	170	172.5
Stem Length	p2p	p2p	p2p	p2p
Stem Angle °	p2p	p2p	p2p	p2p
Seatpost Offset	27/ 9 / -9 / -27	27/ 9 / -9 / -27	27/ 9 / -9 / -27	27/ 9 / -9 / -27
Standover Height	755	797	797	838
Saddle Height Range	630 - 780	660 - 850	660 - 850	700 - 880
Pad Stack V-Cockpit	593 - 643	616 - 665	616 - 665	656 - 705
Pad Reach V-Cockpit	366 - 530	359 - 522	400 - 563	417 - 580
Base Bar Reach V-Cockpit	617	611	652	669
Base Bar Drop V-Cockpit	85	85	85	85
Pad Stack Flat Cockpit	535 - 610	555 - 630	555 - 630	595 - 670
Pad Reach Flat Cockpit	388 - 474	381 - 467	422 - 508	438 - 524
Base Bar Reach Flat Cockpit	619	612	653	670
Base Bar Drop Flat Cockpit	+/- 80	+/- 80	+/- 80	+/- 80

[> Back to Index](#)


TIMEMACHINE Geometry

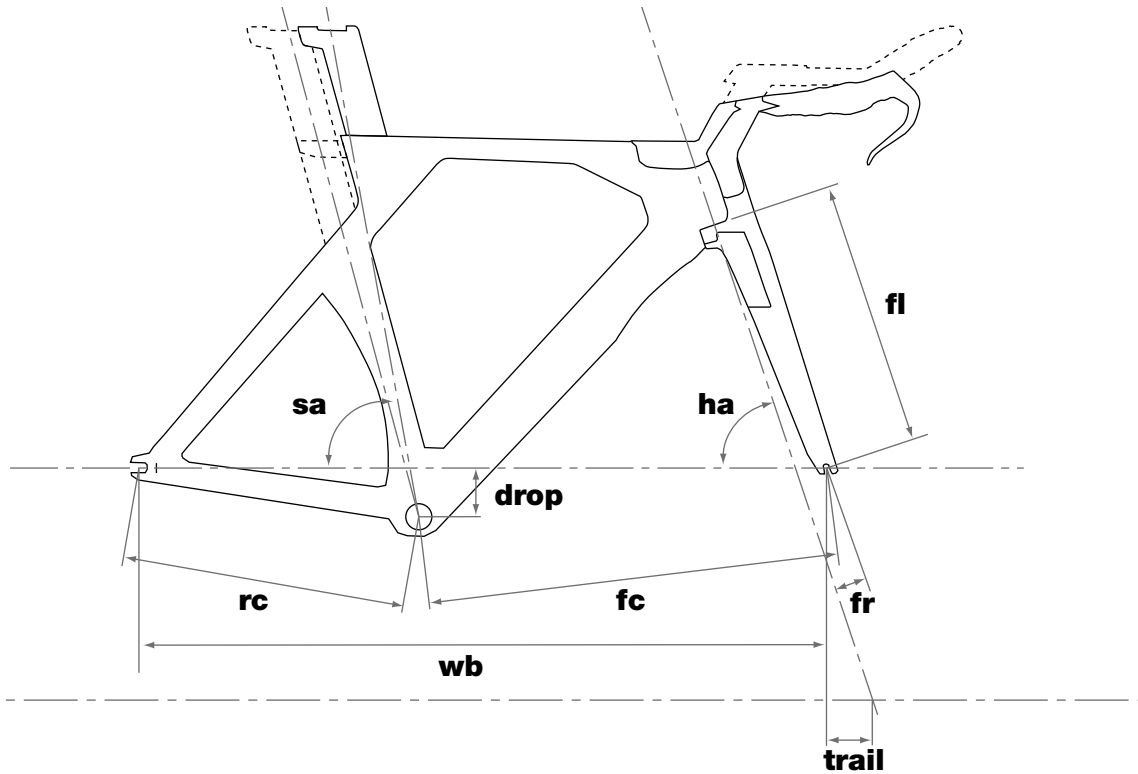

Unless otherwise indicated, all measurements are given in mm.

Size	S	M-S	M-L	L
Rider Height cm	<170	172-180	178-188	186-196
Stack	480	515	515	556
Reach	393	377	418	442
Seat Tube (st)	495	550	550	592
Top Tube (tt')	-	-	-	-
Head Tube (ht)	97	111	111	153
Seat Angle ° (sa)	71.5 - 80.8	71.5 - 80.8	71.5 - 80.8	71.5 - 80.8
Head Angle ° (ha)	71.5	71.5	71.5	71.5
Rear Center (rc)	393-404	393-404	393-404	393-404
Front Center (fc)	580	578	619	649
Wheelbase (wb)	964	967	1008	1038
BB Drop (drop)	58	68	68	68
Fork Length (fl)	374	374	374	374
Fork Rake (fr)	45	45	45	45
Trail	60	60	60	60
Crank Length	165	170	170	172.5
Stem Length	90	90	100	110
Stem Angle°	±8	±8	±8	±8
Bar Width	400	420	420	420
Bar Drop				
Bar Reach	160	160	160	160
Seatpost Length				
Seatpost Offset	27/ 9 / -9 / -27	27/ 9 / -9 / -27	27/ 9 / -9 / -27	27/ 9 / -9 / -27
Standover Height	755	797	797	838
Saddle Height Range	630 - 780	660 - 850	660 - 850	700 - 880


TRACKMACHINE 01 Geometry

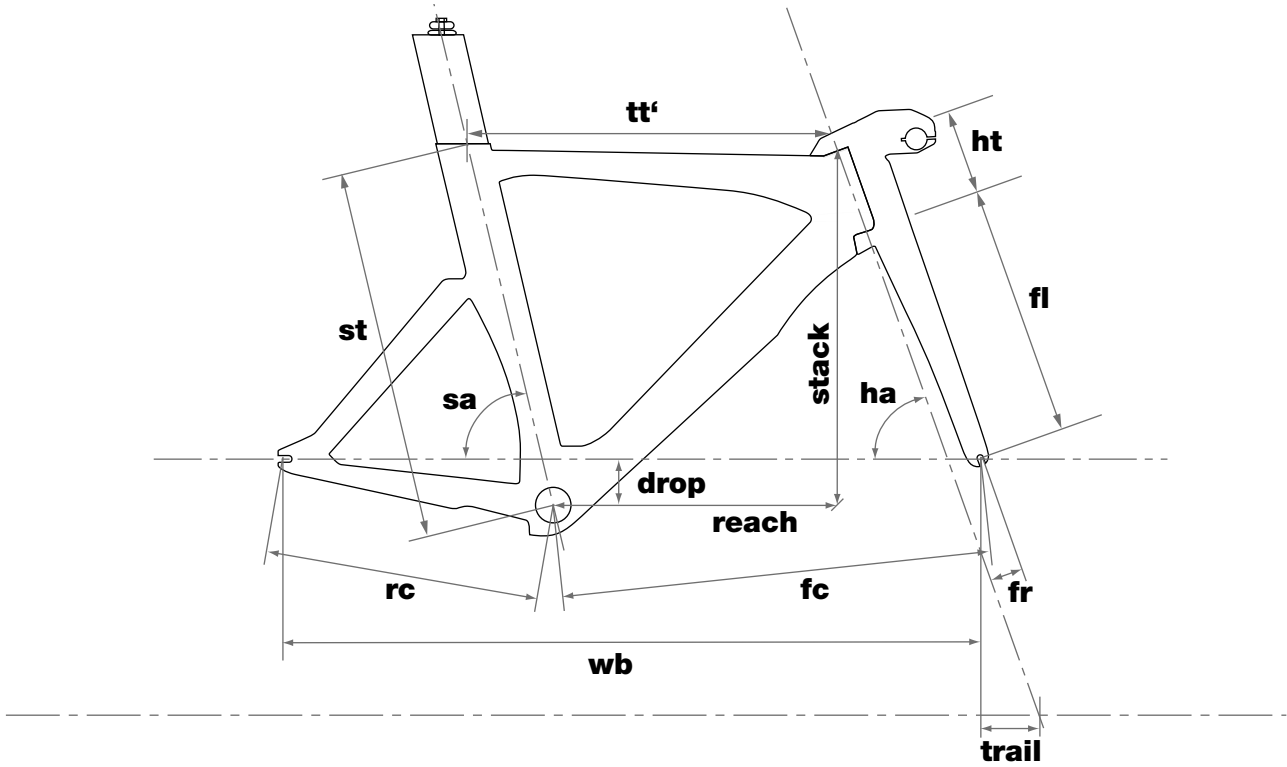

Unless otherwise indicated, all measurements are given in mm.

Size	S	M	L
Rider Height cm	<173	170-185	>183
Stack	471	506	544
Reach	390	408	430
Seat Tube (st)	505	542	582
Top Tube (tt')	525	553	585
Head Tube (ht)	94	134	163
Seat Angle ° (sa)	74	74	74
Head Angle ° (ha)	72	72	72
Rear Center (rc)	390-420	390-420	390-420
Front Center (fc)	586	604	626
Wheelbase (wb)	963	981	1003
BB Drop (drop)	50	58	58
Fork Length (fl)	363	363	363
Fork Rake (fr)	48	48	48
Trail	59	59	59
Crank Length			
Stem Length	p2p Adjustable	p2p Adjustable	p2p Adjustable
Stem Angle°	p2p Adjustable	p2p Adjustable	p2p Adjustable
Bar Width			
Seatpost Length	300	300	300
Seatpost Offset	30/10, -10/-30	30/10, -10/-30	30/10, -10/-30
Standover Height	751	779	817

TRACKMACHINE AL Geometry

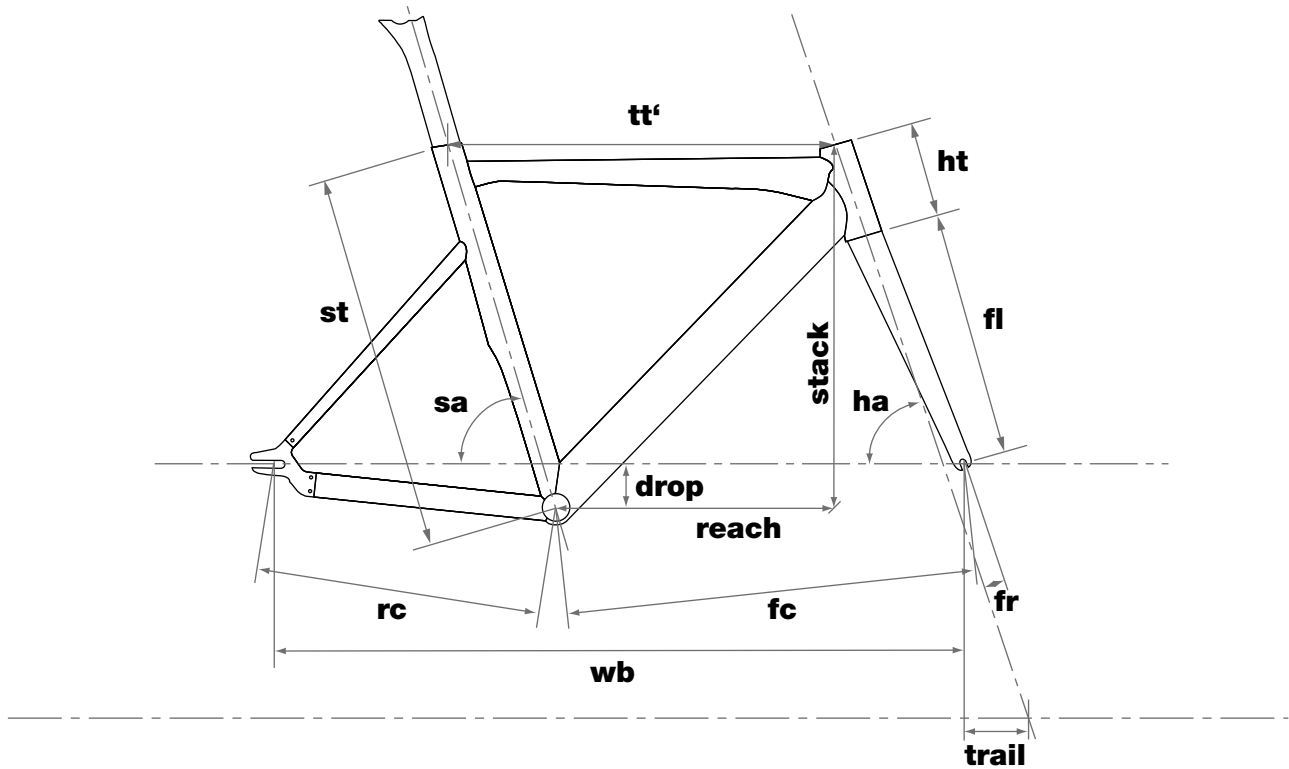

Unless otherwise indicated, all measurements are given in mm.

Size	S	M	L
Rider Height cm	<173	170-185	>183
Stack	490	525	563
Reach	395	402	413
Seat Tube (st)	520	550	585
Top Tube (tt')	540	558	580
Head Tube (ht)	110	138	178
Seat Angle ° (sa)	73.5	73.5	73.5
Head Angle ° (ha)	73	73	73
Rear Center (rc)	390-420	390-420	390-420
Front Center (fc)	577	592	616
Wheelbase (wb)	956	975	999
BB Drop (drop)	50	58	58
Fork Length (fl)	364	364	364
Fork Rake (fr)	43	43	43
Trail	58	58	58
Crank Length	165	170	170
Stem Length	100	110	120
Stem Angle°	±6	±6	±6
Bar Width	400	400	420
Bar Drop (RAB02/03)	125	125	125
Bar Reach (RAB02/03)	70	70	70
Seatpost Length	320	320	320
Seatpost Offset	15	15	15
Standover Height	749	780	807